

ASCENT TILES

INSTALLATION GUIDE



This guide is presented in good faith to assist in the installation of Ascent tiles and infills. It is not intended as an all-encompassing guide, and a professional qualified installer is recommended for optimum results.

Woven Image accepts no responsibility for installation actions taken or not taken. Please refer to Woven Image Pty Ltd. Terms of Trade.

This installation guide contains only recommendations; if you have any questions about installation techniques please contact your distributor or Woven Image sales representative.

Please note:

- Please check that all Ascent tiles and/or infills are the correct colour, shape and same batch number (if requested).
- No claims will be accepted after the Ascent tiles and/or infills have been installed.
- The clips should be tested for wall suitability and type of fixing required.
- All surfaces must be smooth, clean, dry, dust and mould free.
- To obtain a higher NRC result, an infill is available. Please contact Woven Image to order.


SPECIFICATION

Ascent tiles

- Non-woven PET formed acoustic wall tile.
- 900mm (+/- 5mm) x 500mm (+/- 5mm).
- 6 tiles per box (sold by the box only).

BOX CONTENTS

- 6 x Ascent tiles.
- 16 x Clips (4 x clip A, 8 x clip B, 4 x clip C) appropriate for a 2 tile x 3 tile configuration. Additional clips can be purchased, please contact Woven Image to order.
- Installation guide.

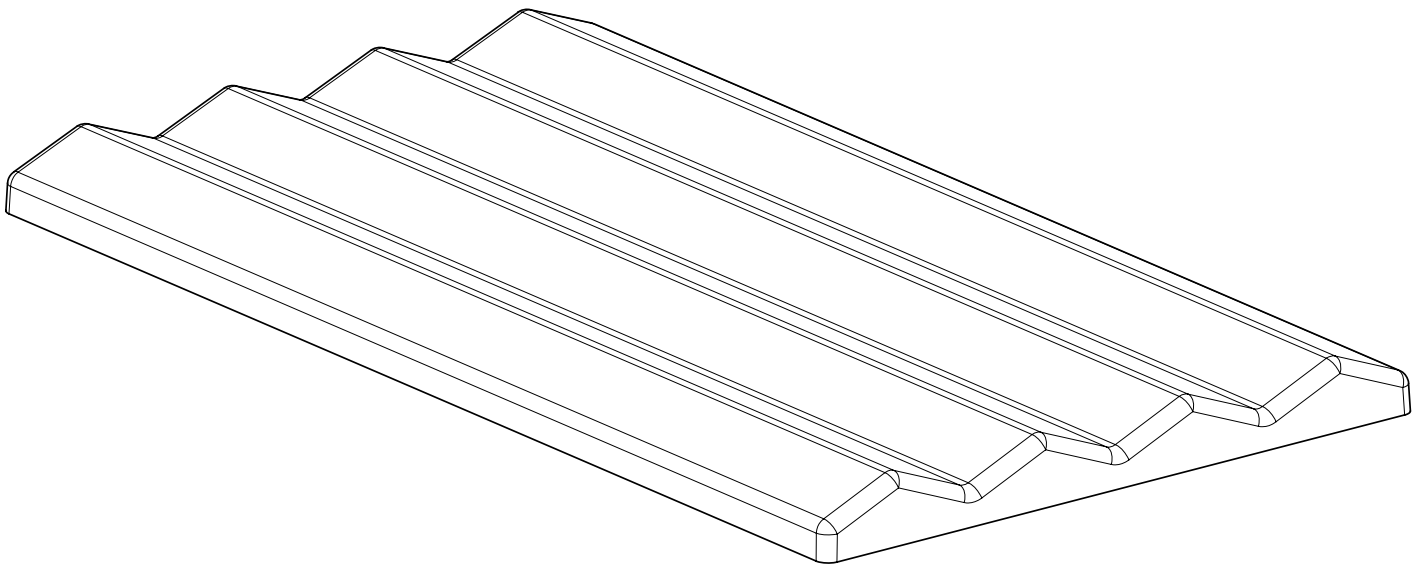


ASCENT TILES

INSTALLATION GUIDE

ASCENT TILE INSTALLATION


Step 1

- Mark out the desired clip pattern. The pattern shown is based on a 900mm x 500mm grid.
- Pattern can also be rotated 90° for landscape layout.

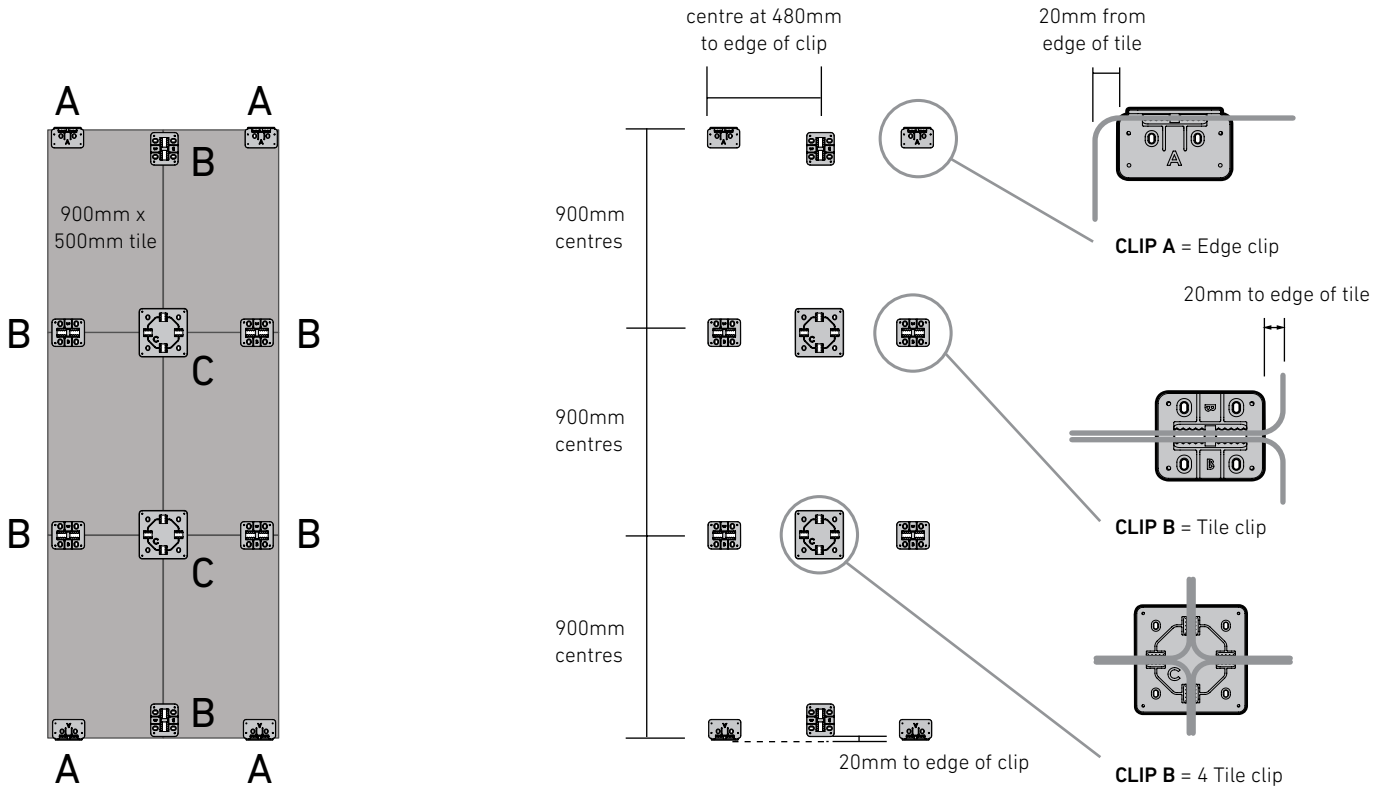

Step 2a

- Choose either nails or screws to suit wall construction.
- Double sided tape can be used to temporarily hold the clips whilst installing them.
- If using nails, it is critical that they are inserted at an angle.

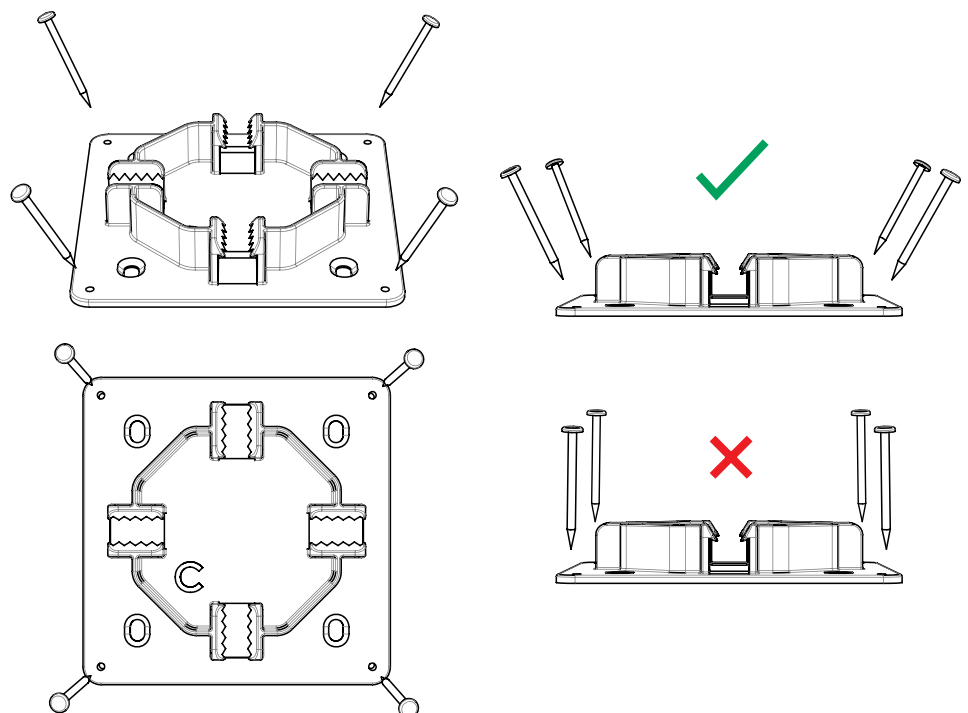


ASCENT TILES

INSTALLATION GUIDE


Step 2b

- Screws may require additional fixing accessories like wall plugs for masonry.

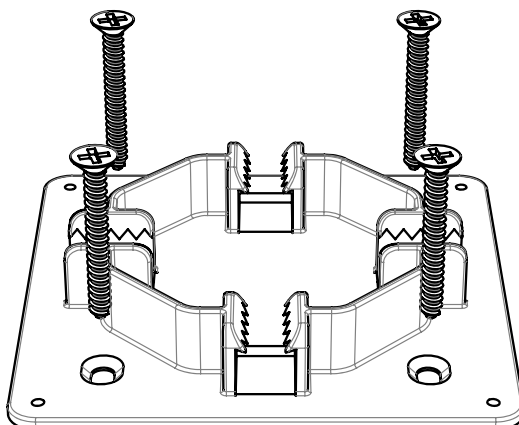


Step 3

- When all the clips are fixed, a grid of clips will be ready to install tiles.

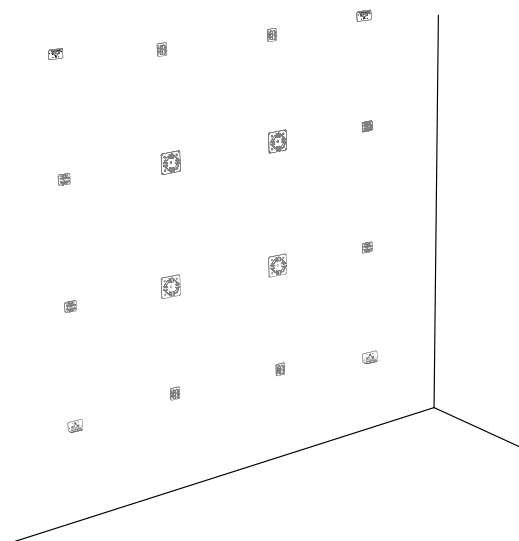

Step 4

- Align tiles (tiles are difficult to remove once installed).
- Align tiles in clips before pushing them into position.

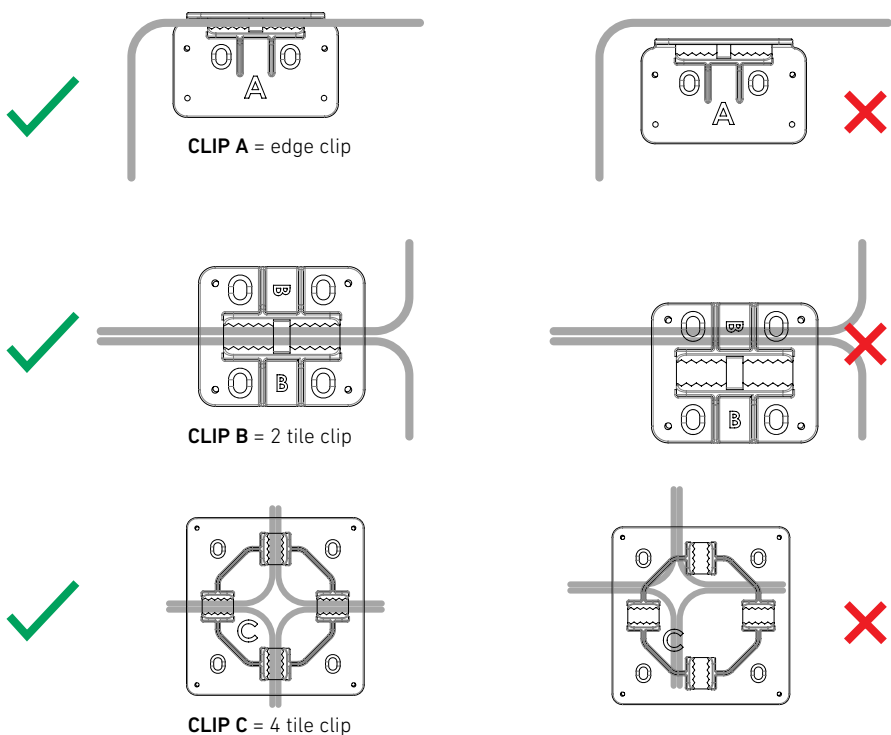


ASCENT TILES

INSTALLATION GUIDE

Step 5

- The clips supplied are appropriate for the installation of 6 tiles arranged in a 3 x 2 grid.
- The arrangement can be achieved with 2 boxes (12 tiles).
- Other layouts will require extra clips.
- All tiles need a clip at each corner.
- Use edge clip (A) for any perimeter corner (as shown).
- Use 2 x tile clip (B) where tiles meet (as shown).
- Use 4 x tile clip (C) where 4 tiles intersect (as shown).
- Any unused clips can be returned to Woven Image for recycling.
- Screws may require additional fixing accessories like wall plugs for masonry.

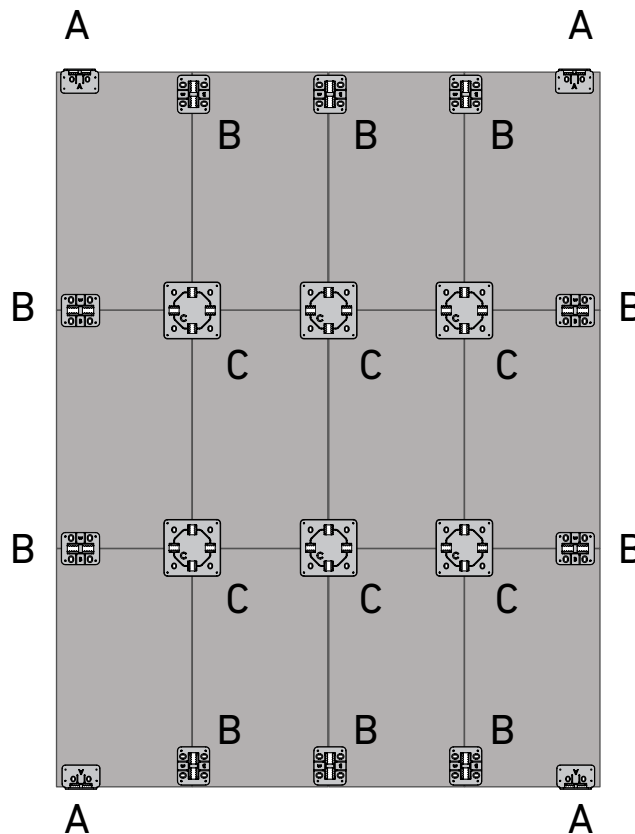

ASCENT INFILL INSTALLATION

- Position Ascent infill into the back of Ascent tile.
- Ensure the hard face of the infill is facing outwards.
- Proceed installing using Ascent tile installation instructions at the beginning of this guide.

SPECIFICATION

- Non-woven acoustic infill.
- 890mm x 480mm x 25mm.
- 6 x infills per box - (sold by the box only).

