

## EchoPanel® Sprig

**Designer:** Woven Image

**Application(s):** Workstations, Walls

### Composition & Pattern

|                          |                                         |
|--------------------------|-----------------------------------------|
| <b>Composition</b>       | 100 % PET (80 % post-consumer recycled) |
| <b>Colours Available</b> | 8                                       |
| <b>Weave</b>             | Woven                                   |
| <b>Pattern Type</b>      | Printed                                 |
| <b>Printed Sides</b>     | Single                                  |
| <b>Print Area</b>        | Horizontal: 1180mm, Vertical: 2780mm    |
| <b>Print Tolerance</b>   | Horizontal: +/-2mm, Vertical: +/-2mm    |
| <b>Pattern Repeat</b>    | One panel: 2780mm x 1180mm              |

### Dimensions & Weight

|                                     |                                                                        |
|-------------------------------------|------------------------------------------------------------------------|
| <b>Dimensions</b>                   | Length: 2780mm (+/-2mm) Width: 1180mm (+/-2mm) Thickness: 12mm (+/-7%) |
| <b>Unit of Sale</b>                 | Panel                                                                  |
| <b>Unit of Sale Net Weight (kg)</b> | 8                                                                      |

## Performance

|                                                                                    |                                                                                                                                               |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Fire Test Result</b>                                                            | ISO 9705: Group 1                                                                                                                             |
| <b>Acoustic Performance Standard Test Method</b>                                   | AS ISO 354: 2006 (R2016)                                                                                                                      |
| <b>Noise Reduction Coefficient (NRC) Result</b>                                    | Direct fix: 0.45, 20mm air gap: 0.60, 50mm air gap: 0.75                                                                                      |
| <b>Sound Absorption Average (SAA) Result</b>                                       | Direct fix: 0.43, 20mm air gap: 0.60, 50mm air gap: 0.75                                                                                      |
| <b>Weighted Sound Absorption Coefficient (<math>\alpha_w</math>) Result</b>        | Direct fix: 0.30 (MH), 20mm air gap: 0.45 (MH), 50mm air gap: 0.60 (MH)                                                                       |
| <b>Sound Absorption Class</b>                                                      | D (Direct fix), D (20mm air gap), C (50mm air gap)                                                                                            |
| <b>Equivalent Absorption Area (<math>A_{eq}</math>) in <math>m^2</math> Sabins</b> | Noise reduction coefficient result key: H = High Frequency & MH = Mid to High Frequency                                                       |
| <b>Colour Fastness to Light Standard Test Method</b>                               | ISO 105 B02                                                                                                                                   |
| <b>Colour Fastness Light Rating</b>                                                | 7                                                                                                                                             |
| <b>Light Reflectance Standard Test Method</b>                                      | ASTM E1477                                                                                                                                    |
| <b>Light Reflectance Value</b>                                                     | Luminous Reflectance Factors (see table below for all colours):<br>Dark (550 Onyx): 2.76, Mid (338 Jade): 20.52, Light (500 Off White): 80.44 |

## Sustainability

|                              |                                                                       |
|------------------------------|-----------------------------------------------------------------------|
| <b>VOC Emissions Results</b> | CDPH Standard Method v1.2 (CA 01350) - PASS; TVOC Range: $<0.5mg/m^3$ |
|------------------------------|-----------------------------------------------------------------------|

## Instructions

**Additional Information**

See Woven Image EchoPanel® Installation Guide.


See Woven Image EchoPanel® Prints Care & Cleaning guide.

Exact colour matching cannot be guaranteed between batches.  
Fibre mix and web variation are natural characteristics of this product.

| COLOUR CODE | COLOUR NAME | LUMINOUS REFLECTANCE FACTOR |
|-------------|-------------|-----------------------------|
| 550         | ONYX        | 2.76                        |
| 542         | BLACK       | 5.36                        |
| 330         | IVY         | 7.30                        |
| 269         | WINE        | 7.34                        |
| 365         | NAVY        | 8.04                        |
| 193         | ROUGE       | 10.94                       |
| 447         | SLATE       | 11.88                       |
| 484         | CAYENNE     | 13.75                       |
| 167         | CINNAMON    | 14.44                       |
| 349         | VINEYARD    | 16.76                       |
| 384         | OLIVE       | 17.60                       |
| 660         | CORONET     | 19.07                       |
| 295         | MANDARIN    | 20.07                       |
| 444         | SMOKE       | 20.09                       |
| 633         | PACIFIC     | 20.38                       |
| 338         | JADE        | 20.52                       |
| 402         | PEBBLE      | 21.25                       |
| 721         | NUTMEG      | 26.62                       |
| 442         | GREY        | 30.40                       |
| 580         | SAGE        | 32.77                       |
| 579         | PISTACHIO   | 33.98                       |
| 551         | BLUE        | 35.67                       |
| 124         | OCHRE       | 36.09                       |
| 274         | ORCHID      | 38.14                       |
| 487         | BLUSH       | 40.06                       |
| 495         | DUSK        | 41.16                       |
| 468         | VANILLA     | 42.59                       |
| 101         | FROST       | 45.64                       |
| 454         | MUSHROOM    | 52.03                       |
| 573         | MINT        | 54.87                       |
| 908         | CREAM       | 60.13                       |
| 106         | BUTTER      | 69.31                       |
| 381         | LIME SPLICE | 69.31                       |
| 500         | OFF WHITE   | 80.44                       |

Ben Goss Collection - EchoPanel® 12mm Sprig

1180mm

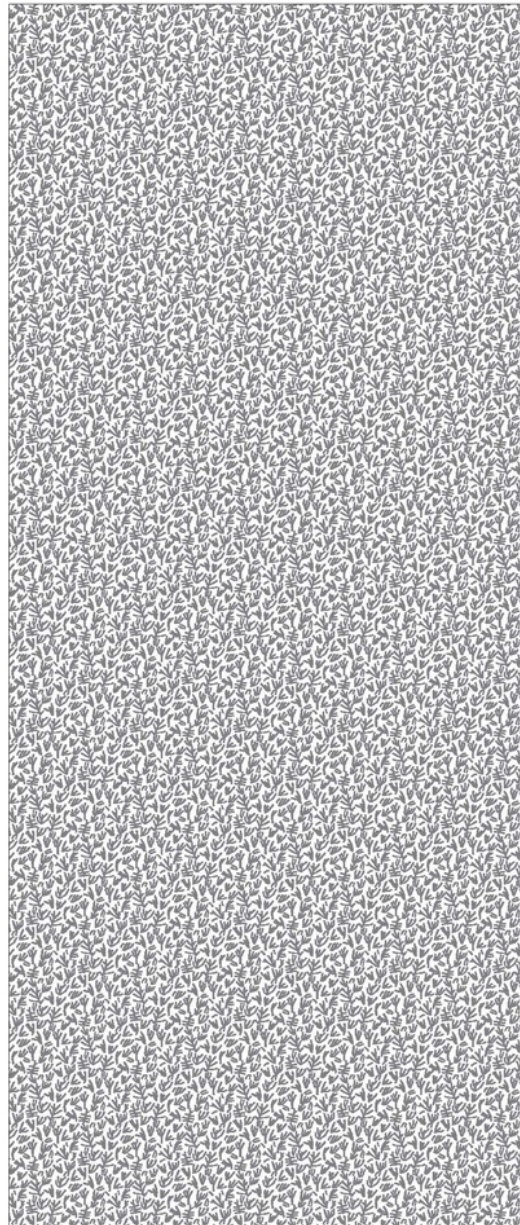

2780mm