

EchoPanel® Paling

Designer: Woven Image

Application(s): Partitions

Composition & Pattern

Composition 100 % PET (60 % post-consumer recycled)

Hardware Composition ABS Plastic

Colours Available 3

Kit & Box Content

Box Contents EchoPanel pieces & Joiners of your choice

Dimensions & Weight

Dimensions Height: 1750 (+/- 2mm), Width: 285 (+/- 2mm), Thickness: 24mm
(+/- 7% Joiners are available in either Cream or Charcoal)

Unit of Sale Piece

Unit of Sale Net Weight (kg) 3.8

Performance

Fire Test Result ISO 9705: Group 1, BS EN 13501.1: Classification B - s1, d0, ASTM E84 Unadhered: Class 1 or A

Acoustic Performance Standard Test Method AS ISO 354: 2006 (R2016)

Noise Reduction Coefficient (NRC) Result EchoPanel® 24mm achieves:
Direct fix: 0.65

Sound Absorption Average (SAA) Result EchoPanel® 24mm achieves:
Direct fix: 0.63

Weighted Sound Absorption Coefficient (α_w) Result EchoPanel® 24mm achieves: Direct fix: 0.45 (MH)

Sound Absorption Class D (Direct fix)

Additional Acoustic Information Sound Absorption Class result is based on EchoPanel® 24mm. MH = Mid to High Frequency

Colour Fastness to Light Standard Test Method ISO 105 B02

Colour Fastness Light Rating 6 - 7

Sustainability

VOC Emissions Results EchoPanel 24mm achieves ASTM D5116: TVOC Emissions Rate: $<0.02\text{mg}/\text{m}^2/\text{hr}$ (7 days), and CDPH Standard Method v1.2: TVOC Emissions Rate: $<0.054\text{mg}/\text{m}^3$; Formaldehyde Emissions Rate: $<2\mu\text{g}/\text{m}^3$

Sustainability Performance




Sustainability Performance Details EchoPanel achieves GreenTag Certification GreenRate: Level A & Health Rate Platinum, Red List Free, and has an International

Instructions

Additional Information See Woven Image EchoPanel® Care & Cleaning Guide.


Exact colour matching cannot be guaranteed between batches.
Fibre mix and web variation are natural characteristics of this product.

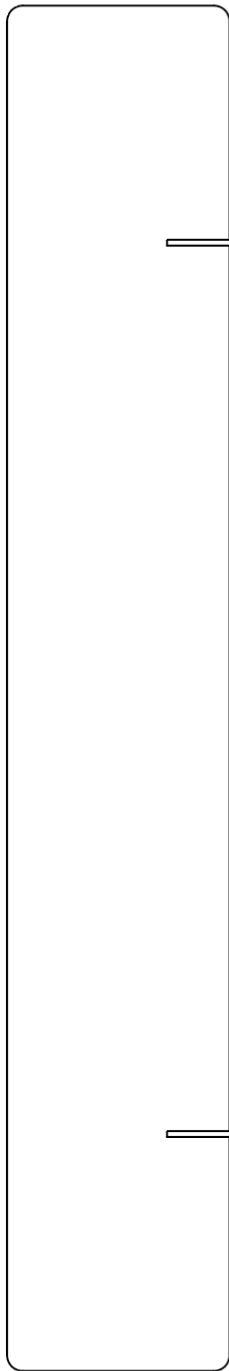

Paling A
285 x 1750mm



Paling B
285 x 1750mm

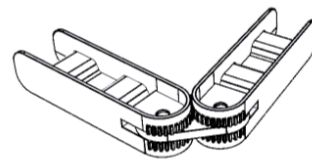

Pivot Joiner
(sold separately)