

EchoPanel® Meridian

Designer: Woven Image

Application(s): Walls, Partitions

Composition & Pattern

Composition 100% PET (80% post-consumer recycled)

Colours Available 37

Pattern Type Precision Cut

Dimensions & Weight

Dimensions Length: 2750mm (+/- 2 mm), Width: 1100mm (+/- 2mm), Thickness: 12mm (+/- 7%). Also available in 24mm (+/- 7%), specifications will differ.

Unit of Sale Panel

Unit of Sale Net Weight (kg) 8

Performance

Fire Test Result AS 1530.3, BS EN 13501.1: Classification B - s1, d0, ISO 9705: Group 1, ASTM E84 Unadhered: Class 1 or A, GB 8624 B1, BS EN 45545-2 + A1 Annex C: CIT: 0.05

Acoustic Performance Standard Test Method AS ISO 354: 2006 (R2016), AS ISO 11654: 2002 (2016), ASTM C423 - 17

Noise Reduction Coefficient (NRC)	Direct fix: 0.45
Result	
Sound Absorption Average (SAA)	Direct fix: 0.43
Result	
Weighted Sound Absorption Coefficient (α_w)	Direct fix: 0.30 (MH)
Result	
Sound Absorption Class	D (Direct fix)
Additional Acoustic Information	Noise reduction coefficient result key: H = High Frequency / MH = Mid to High Frequency
Colour Fastness to Light Standard	ISO 105 B02
Test Method	
Colour Fastness Light Rating	6 – 7
Light Reflectance Standard Test Method	ASTM E1477
Light Reflectance Value	Luminous Reflectance Factors (see table below for all tested colours): Dark (542 Charcoal): 5.36, Mid (338 Jade): 20.52, Light (500 Off White): 80.44

Sustainability

VOC Emissions Results ASTM D5116 - 2017: TVOC Emissions Rate: 0.033mg/m²/hr (24hrs); Formaldehyde Emissions Rate: 0.07mg/m²/hr. CDPH Standard Method v1.2 - 2017 (CA 01350): TVOC Emissions Rate: 0.013mg/m³; Formaldehyde Emissions Rate: <1µg/m³

Sustainability Performance






Declare.



Instructions


Additional Information See Woven Image EchoPanel® Care & Cleaning Guide.
See Woven Image EchoPanel® Precision Cut Panels Installation Guide.

Exact colour matching cannot be guaranteed between batches.
Fibre mix and web variation are natural characteristics of this product.

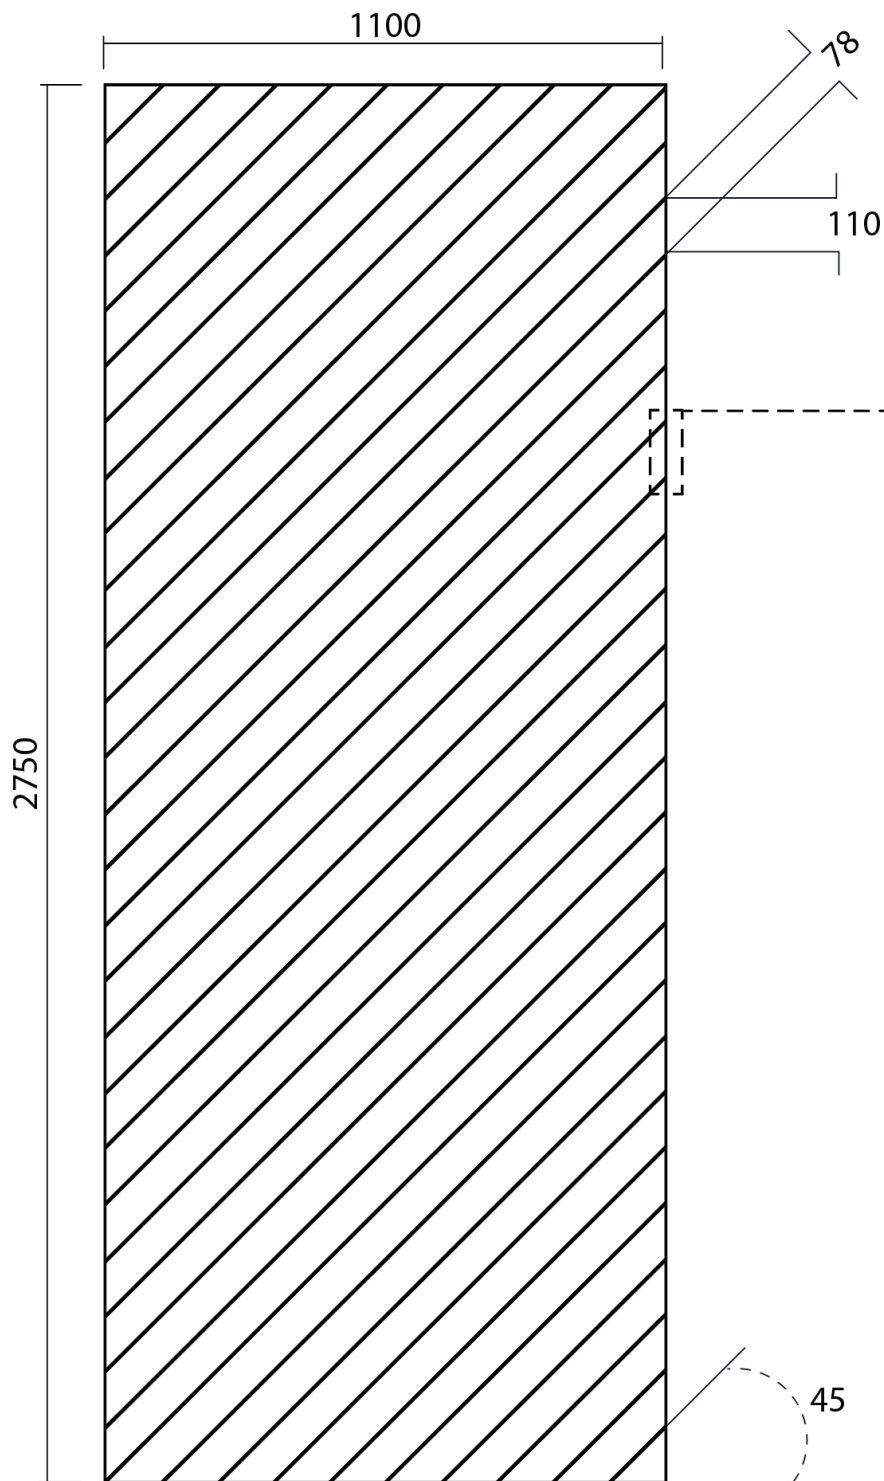

Note: Vee groove depth is 5mm.

110mm sides compatible with Longitude and Latitude panels.

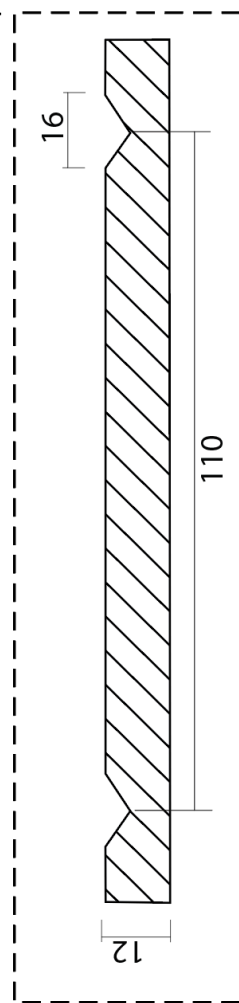

LUMINOUS REFLECTANCE (ASTM E1477-98A: 2017) ECHOPANEL® 12mm

COLOUR CODE	COLOUR NAME	LUMINOUS REFLECTANCE FACTOR
542	CHARCOAL	5.36
365	NAVY	8.04
193	ROUGE	10.94
447	SLATE	11.88
484	CAYENNE	13.75
167	CINNAMON	14.44
349	VINEYARD	16.76
384	OLIVE	17.60
660	CORONET	19.07
295	MANDARIN	20.07
444	SMOKE	20.09
338	JADE	20.52
402	PEBBLE	21.25
721	NUTMEG	26.62
442	GREY	30.40
580	SAGE	32.77
579	PISTACHIO	33.98
551	DUCK EGG	35.67
124	OCHRE	36.09
274	ORCHID	38.14
487	BLUSH	40.06
495	DUSK	41.16
468	VANILLA	42.59
101	FROST	45.64
454	MUSHROOM	52.03
573	MINT	54.87
908	CREAM	62.07
106	BUTTER	69.31
381	LIME SPLICE	69.31
500	OFF WHITE	80.44

LUMINOUS REFLECTANCE (ASTM E1477-98A: 2017) ECHOPANEL® 24mm

COLOUR CODE	COLOUR NAME	LUMINOUS REFLECTANCE FACTOR
550	ONYX	2.76
330	IVY	7.30
269	WINE	7.34
633	PACIFIC	20.38