Curtain

Designer: Woven Image

Application(s): Walls

Composition & Pattern

Composition	98.5% PET (50% post-consumer recycled) 1.5% PE
Colours Available	8
Pattern Type	Formed

Dimensions & Weight

Dimensions	Length: 2800mm (+/-5mm) Width: 975mm (+10mm/-5mm) Depth: 45mm (+/-5mm) Thickness: 9mm (+/-7%)
Unit of Sale	Panel
Unit of Sale Net Weight (kg)	7

Performance

Fire Test Result	ISO 9705: Group 1
Acoustic Performance Standard Test Method	AS ISO 354: 2006 (R2016)
Noise Reduction Coefficient (NRC) Result	Direct Fix: 0.60

Copyright Woven Image

Sound Absorption Average (SAA) Result	Direct Fix: 0.60
Weighted Sound Absorption Coefficient (αw) Result	Direct Fix: 0.50 (MH)
Sound Absorption Class	D (Direct fix)
Colour Fastness to Light Standard Test Method	ISO 105 B02
Colour Fastness Light Rating	7
Colour Fastness to Rubbing Standard Test Method	ISO 105 - X12
Colour Fastness to Rubbing Rating	Wet: 5, Dry: 5

Sustainability


VOC Emissions Results	ASTM D5116 Rate: 0.015 mg/m^2/hr (7 days); CDPH Standard Method v1.2 (CA 01350); TVOC Emissions Rate: 0.010mg/m^3; Formaldehyde Emission Rate: <5 µg/m^3
Sustainability Performance	

Copyright Woven Image

Instructions

Additional Information	See Woven Image Embossed and 3D Formed Panels Care & Cleaning Guide. See Woven Image 3D Formed Installation Guide. Exact colour matching cannot be guaranteed between batches. Fibre mix and web variation are natural characteristics of this product.

Copyright Woven Image

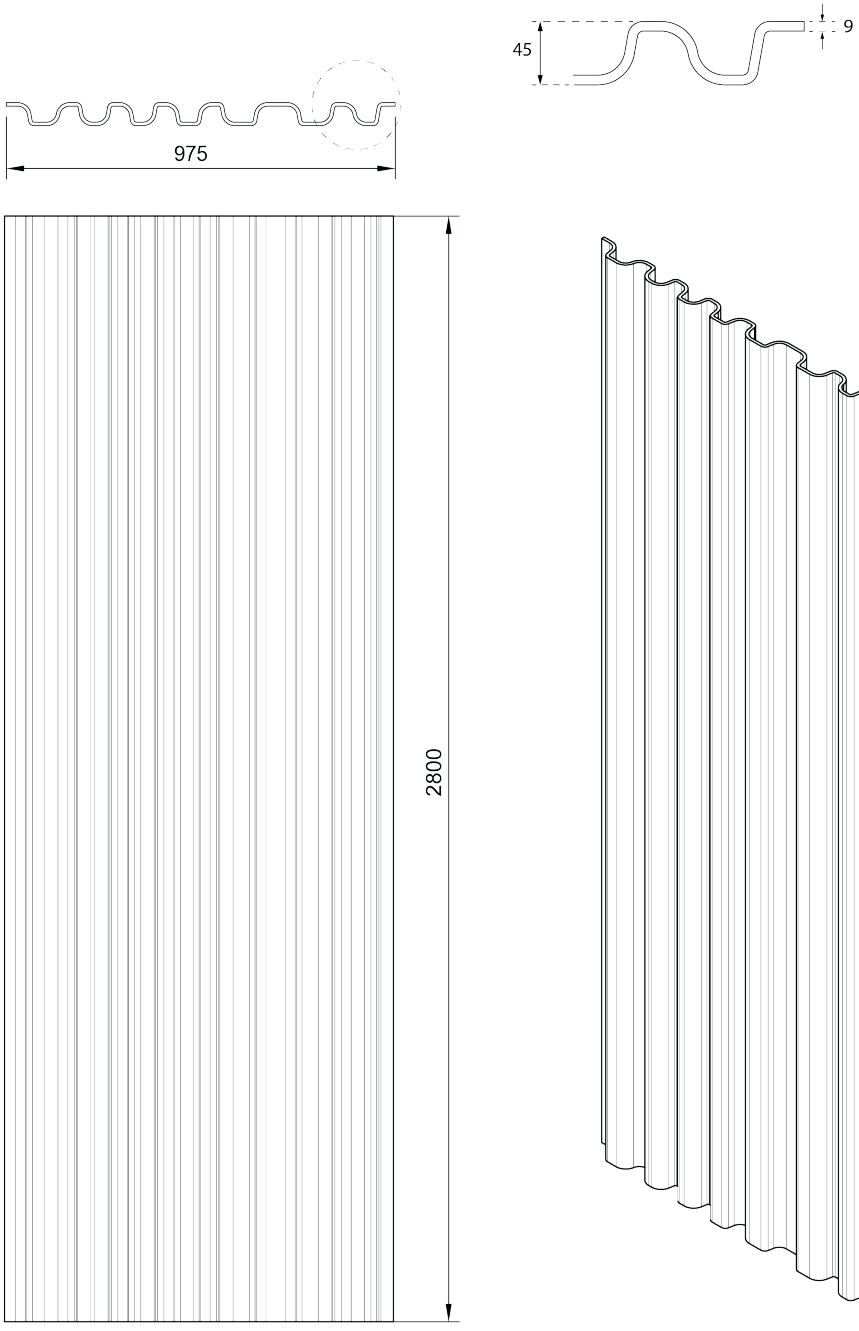

Copyright Woven Image