

EchoPanel® Cloudy

Designer: Michael Young in collaboration with Woven Image

Application(s): Workstations, Walls

Composition & Pattern

Composition	100% PET (60% post-consumer recycled PET)
Colours Available	20
Pattern Type	Printed
Printed Sides	Single
Print Area	Horizontal: 2780mm, Vertical: 1180mm
Print Tolerance	Horizontal: +/-2mm, Vertical: +/-2mm
Pattern Repeat	Horizontal: 1180mm, Vertical: 2780mm

Dimensions & Weight


Dimensions	Length: 2800mm (+/-2mm) Width: 1200mm (+/-2mm) Thickness: 12mm (+/-7%)
Unit of Sale	Panel
Unit of Sale Net Weight (kg)	8

Performance

Fire Test Result	AS 1530.3, ISO 9705: Group 1, GB 8624 B1, BS EN 13501.1: Classification B - s1, d0
Acoustic Performance Standard Test Method	AS ISO 354: 2006 (R2016), AS ISO 11654: 2002 (2016), ASTM C423 - 17
Noise Reduction Coefficient (NRC) Result	Direct fix: 0.45, 20mm air gap: 0.60, 50mm air gap: 0.75
Sound Absorption Average (SAA) Result	Direct fix: 0.43, 20mm air gap: 0.60, 50mm air gap: 0.75
Weighted Sound Absorption Coefficient (α_w) Result	Direct fix: 0.30 (MH), 20mm air gap: 0.45 (MH), 50mm air gap: 0.60 (MH)
Sound Absorption Class	D (Direct fix), D (20mm air gap), C (50mm air gap)
Equivalent Absorption Area (A_{eq}) in m^2 Sabins	Noise reduction coefficient result key: H = High Frequency & MH = Mid to High Frequency
Colour Fastness to Light Standard Test Method	ISO 105 B02
Colour Fastness Light Rating	6 - 7
Other Testing	Fire tests are based on plain EchoPanel® 12mm

Instructions

Additional Information	See Woven Image EchoPanel® Installation Guide. See Woven Image EchoPanel® prints Care & Cleaning guide. Exact colour matching cannot be guaranteed between batches. Fibre mix and web variation are natural characteristics of this product.
-------------------------------	--

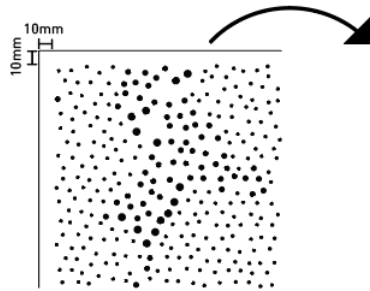

Please note there is an
unprinted boarder of approx
10mm around the panel.
Panels will require trimming for
edge to edge pattern matching.

