

Pendent Ion Duet

Designer: Woven Image

Application(s): Partitions

Composition & Pattern

Composition 100% PET (60% post-consumer recycled)

Colours Available 20

Pattern Type Embossed

Kit & Box Content

Box Contents 1 x EchoPanel piece & 1 Hardware kit

Component Details Hardware kit includes:
4 x Brackets (includes 2 pins)
12 x Sleeves (4 of each colour - gold, silver & charcoal)
2 x Cables (Length: 2000mm per cable)
2 x Ceiling mounts
2 x Wire spacers

Dimensions & Weight

Dimensions Length: 2400mm (+/-3mm) Width: 1120mm (+/-3mm) Thickness: 12mm (+/-10%)(16mm including typography)

Unit of Sale Panel

Performance

Fire Test Result ISO 9705: Group 1, BS EN 13501.1: Classification B - s1, d0, ASTM E84 Unadhered: Class 1 or A

Acoustic Performance Standard Test Method AS ISO 354: 2006 (R2016)

Additional Acoustic Information See last page on absorption area in m² Sabin table and graph.

Colour Fastness to Light Standard Test Method ISO 105 B02

Colour Fastness Light Rating 6 - 7

Sustainability

VOC Emissions Results ASTM D5116: TVOC Emissions Rate: <0.02mg/m²/hr (7 days), and CDPH Standard Method v1.2: TVOC Emissions Rate: <0.054mg/m³; Formaldehyde Emissions Rate: <2µg/m³

Sustainability Performance



Declare.




Instructions

Additional Information See Woven Image EchoPanel Care & Cleaning Guide.

See Woven Image Pendant Installation Guide.


Exact colour matching cannot be guaranteed between batches.
Fibre mix and web variation are natural characteristics of this product.

Absorption per panel (m²/Sabin)

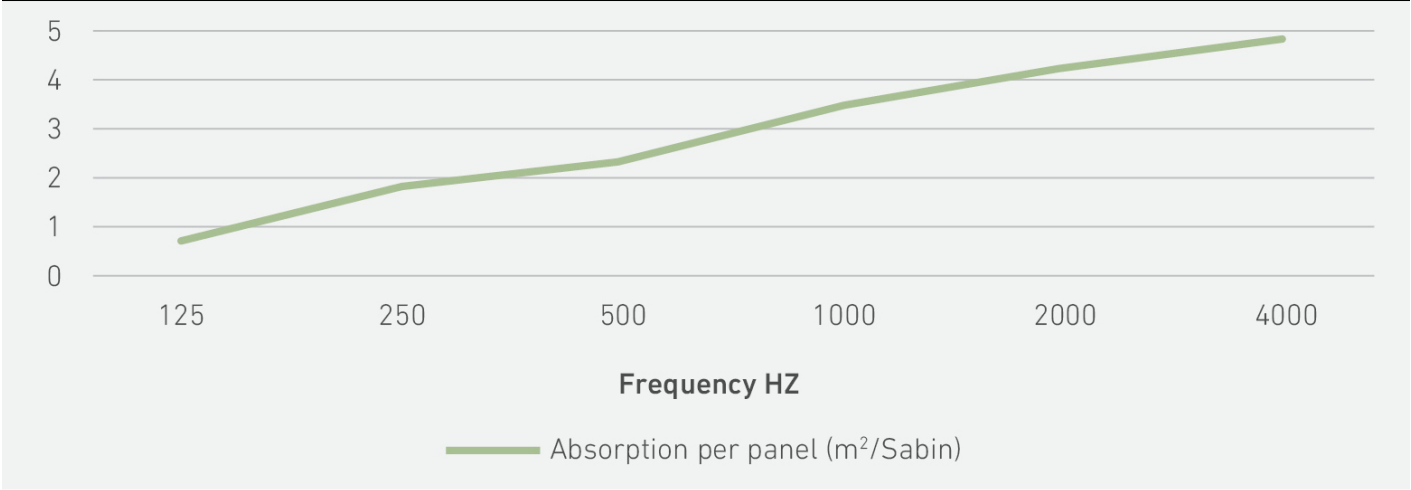

Pendent Dimensions mm	o.d.s* mm	Equivalent absorption area per panel (m ² Sabin)					
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
2400 x 1100 x 12mm	2600	0.76	1.89	2.39	3.32	4.08	4.69

*o.d.s = overall depth of system

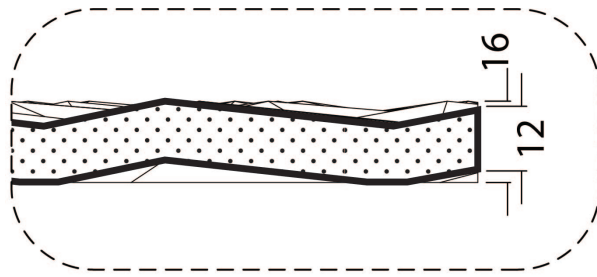

1120



2700

