

Dune Tile

Designer: Bang Design in collaboration with Woven Image

Application(s): Walls

Composition & Pattern

Composition 100% PET (27% Recycled)

Hardware Composition Clips: Polycarbonate resin

Colours Available 8

Pattern Type Formed

Kit & Box Content

Box Contents 9 x Dune Tiles & 1 x bag of clips

Component Details 16 clips with screws included

Dimensions & Weight

Dimensions Length: 500mm (+/- 5mm), Width: 500mm (+/- 5mm), Depth: 50mm (+/- 5mm), Thickness: 4mm (+/- 0.5mm)

Unit of Sale Box

Unit of Sale Net Weight (kg) 4.16

Performance

Fire Test Result	AS 3837: Group 3, ASTM E84 Unadhered: Class 1 or A, BS 476: Class 2Y
Acoustic Performance Standard Test Method	AS ISO 354: 2006 (R2016)
Noise Reduction Coefficient (NRC) Result	Direct Fix: 0.60
Sound Absorption Average (SAA) Result	Direct Fix: 0.58
Weighted Sound Absorption Coefficient (α_w) Result	Direct Fix: 0.50 (MH)
Sound Absorption Class	D (Direct fix)
Additional Acoustic Information	Noise reduction coefficient result key: H = High Frequency / MH = Mid to High Frequency
Colour Fastness to Light Standard Test Method	ISO 105 B02
Colour Fastness Light Rating	6

Sustainability

VOC Emissions Results	ASTM D5116: TVOC Emissions Rate: $<0.011\text{mg}/\text{m}^2/\text{hr}$ (7 days), and CDPH Standard Method v1.2: TVOC Emissions Rate: $<0.010\text{mg}/\text{m}^3$; Formaldehyde Emissions Rate: $<2\mu\text{g}/\text{m}^3$
------------------------------	--



Sustainability Performance




Instructions

Additional Information See Woven Image Mura Unprinted Composite Panels & Tiles Care & Cleaning Guide.
See Woven Image Wave & Dune Tiles Installation Guide.


Exact colour matching cannot be guaranteed between batches.
Fibre mix and web variation are natural characteristics of this product.

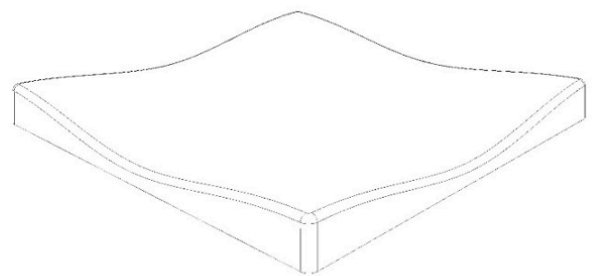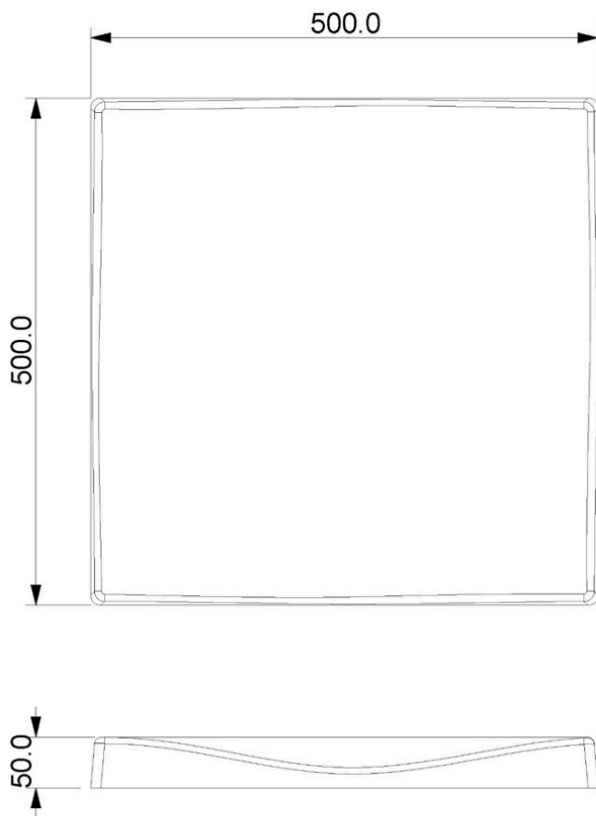


9 x Dune Tiles



4 x A clip



8 x B clip



4 x C clip